

# SAFETYFIX SYSTEMS




**Biquadro Srl** presents **SAFETYFIX SYSTEMS**. It was born from the need to mount and dismount repeatedly - in easy and safely way - the ceiling panels and wall panels on motor yachts. The system consists of two types of fixing.


**SAFETYFIX** is not an "on-off" fixing system like common pressure fixing systems. It is a fixing system that exerts constant upward traction, and at the same time it is also a panel anti-fall device. It is composed by of a red "collar" and a V spring with two folds that play as a safety hooks: in case of accidental release the panel does not fall, it remains hung for a total safety. With Safetyfix a single operator is enough to assemble and disassemble ceiling panels, even in large dimensions.

**SPAZIO6** ("space6") is the innovative pressure fixing device that allows a remarkable reduction of the number about fixing points. It guarantees 100% fixing once inserted in the coupling ring, screwed on the counter panel with only two screws.

The **SAFETYFIX SYSTEMS** devices guarantee an effective cost and time saving, and a total safety fixing in comparison to the most common and traditional pressure fixing systems.

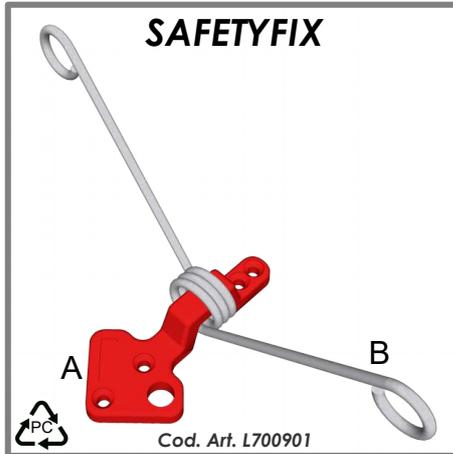




Cod. Art. L700901

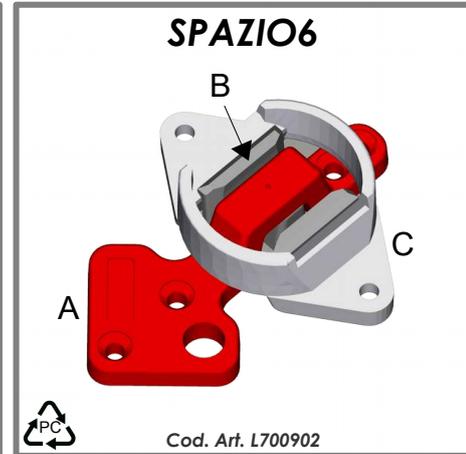

Cod. Art. L700902

red collar (A)	recyclable polycarbonate	
V spring (B)	armonic stainless steel	
Ø fixing hole, standard size	Ø 40 mm	
hole position on raw counter panel	center hole at 50 mm from the border of the finishing panel	
guaranteed tensile strenght	16 Kg	on a single fixing point
	120 Kg	nr. 4 fixing points, with panel in safety position
screws number	from 2 up to 4 screws	
adjustment position *	Δ 10 mm [in every direction]	
weight	27 g.	

red collar (A)	recyclable polycarbonate	
joint (B); ring (C)	recyclable polycarbonate	
Ø fixing hole, for insert the ring (C)	Ø 40 mm, standard size	
hole position on raw counter panel	center hole at 50 mm from the border of the finishing panel	
guaranteed tensile strenght	16 Kg	on a single fixing point
screws number	from 4 up to 6 screws	
adjustment position *	Δ 5 mm [in every direction]	
weight	22 g.	

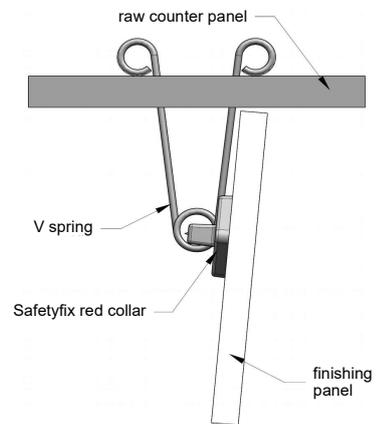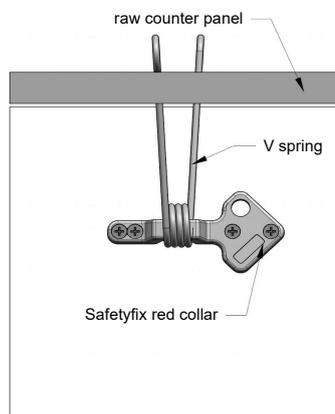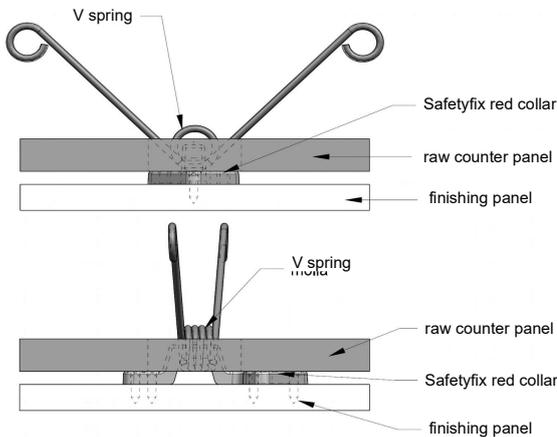

Le informazioni possono cambiare senza preavviso e senza responsabilità da parte di Biquadro Srl.  
Above values could change without Biquadro Srl responsibility.

Rev. ENG 01-2020